


TYPICALLY FOR INDUSTRIAL USERS

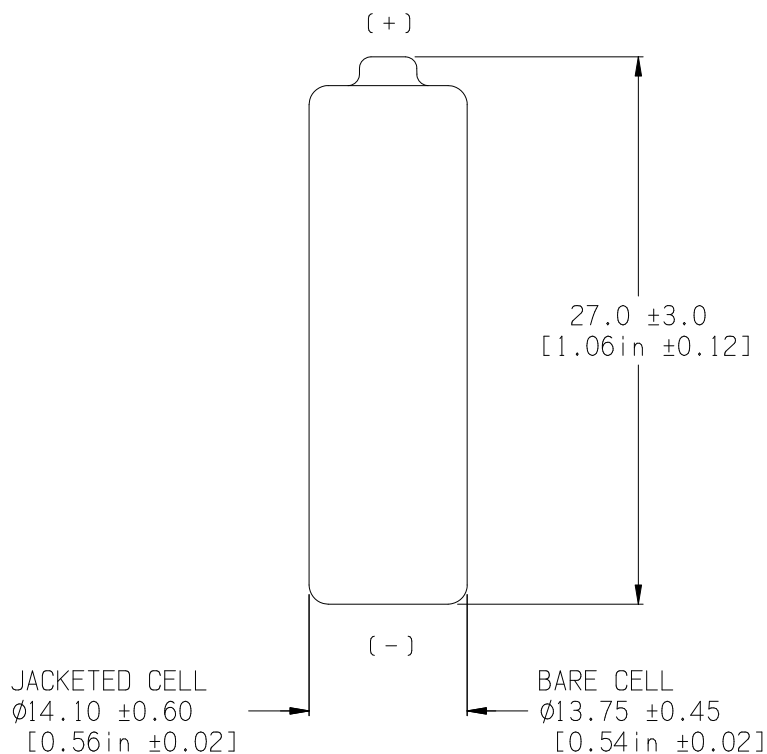

TYPICAL SPECIFICATIONS

| | | | | |
|--|-------------|--------------|-------------|--------------------------|
| ELECTROCHEMICAL SYSTEM: NICKEL CADMIUM OR NICKEL-METAL HYDRIDE | | | | |
| NOMINAL VOLTAGE: 1.2 | | | | |
| MAXIMUM OFF-LOAD VOLTAGE: 1.5 | | | | |
| RATED CAPACITY: | | | | |
| AVERAGE WEIGHT: | | | | |
| OPERATING TEMP. RANGE: CHARGE: 0°C TO 50°C (32°F TO 122°F), DISCHARGE: -20°C TO 50°C (-4°F TO 122°F) | | | | |
| ANSI DESIGNATION: 1.2K9, 1.2H9 | | | | |
| TYPICAL USE | LOAD (OHMS) | DAILY PERIOD | END POINT V | MINIMUM AVERAGE DURATION |
| RATING | | | | |

TYPICAL MPD HOLDER NO.

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

| | | | | | | | | | | | | |
|-----|----------|----------|----------|-------|--------|-------|-----------|---------|-------|---------|-------|-------|
| AWI | DURACELL | EVEREADY | IEC | KODAK | MAXELL | NEDA | PANASONIC | RAYOVAC | SANYO | TOSHIBA | VARTA | OTHER |
| | | | KR 15/30 | | | 1.2K9 | | | | | | |