


TYPICALLY FOR INDUSTRIAL USERS

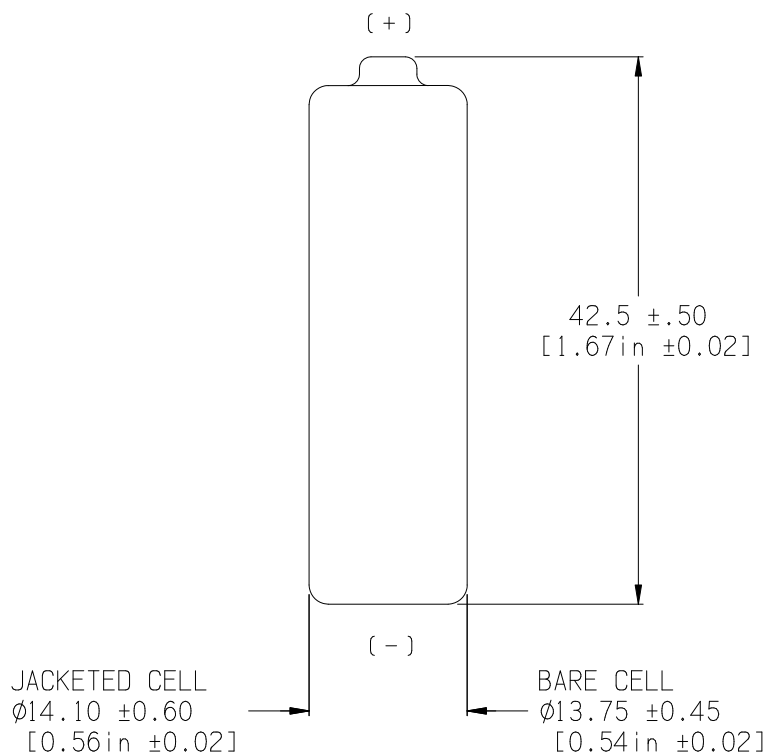

TYPICAL SPECIFICATIONS

ELECTROCHEMICAL SYSTEM:	NICKEL CADMIUM OR NICKEL-METAL HYDRIDE
NOMINAL VOLTAGE:	1.2
MAXIMUM OFF-LOAD VOLTAGE:	1.5
RATED CAPACITY:	1150mAh TO 1.0V AT 20°C (68°F)
AVERAGE WEIGHT:	0.81 oz (23.0 g)
OPERATING TEMP. RANGE:	CHARGE: 0°C TO 50°C (32°F TO 122°F), DISCHARGE: -20°C TO 50°C (-4°F TO 122°F)
ANSI DESIGNATION:	1.2K10, 1.2H10

TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION
RATING				

TYPICAL MPD HOLDER NO.

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	TOSHIBA	VARTA	OTHER
			HR 15/43			1.2H10	HHR120AA					