


TYPICALLY FOR INDUSTRIAL USERS

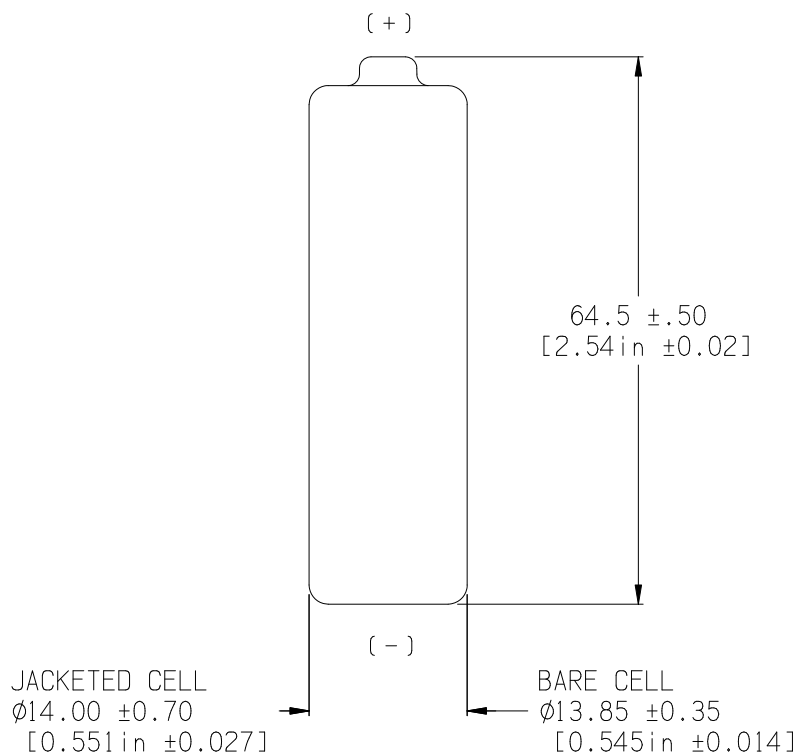

TYPICAL SPECIFICATIONS

ELECTROCHEMICAL SYSTEM: NICKEL CADMIUM OR NICKEL-METAL HYDRIDE				
NOMINAL VOLTAGE: 1.2				
MAXIMUM OFF-LOAD VOLTAGE: 1.5				
RATED CAPACITY:				
AVERAGE WEIGHT:				
OPERATING TEMP. RANGE: CHARGE: 0°C TO 50°C (32°F TO 122°F), DISCHARGE: -20°C TO 50°C (-4°F TO 122°F)				
ANSI DESIGNATION: 1.2K12, 1.2H12				
TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION
RATING				

TYPICAL MPD HOLDER NO.

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	TOSHIBA	VARTA	OTHER
						1.2K12						