


TYPICALLY FOR INDUSTRIAL USERS

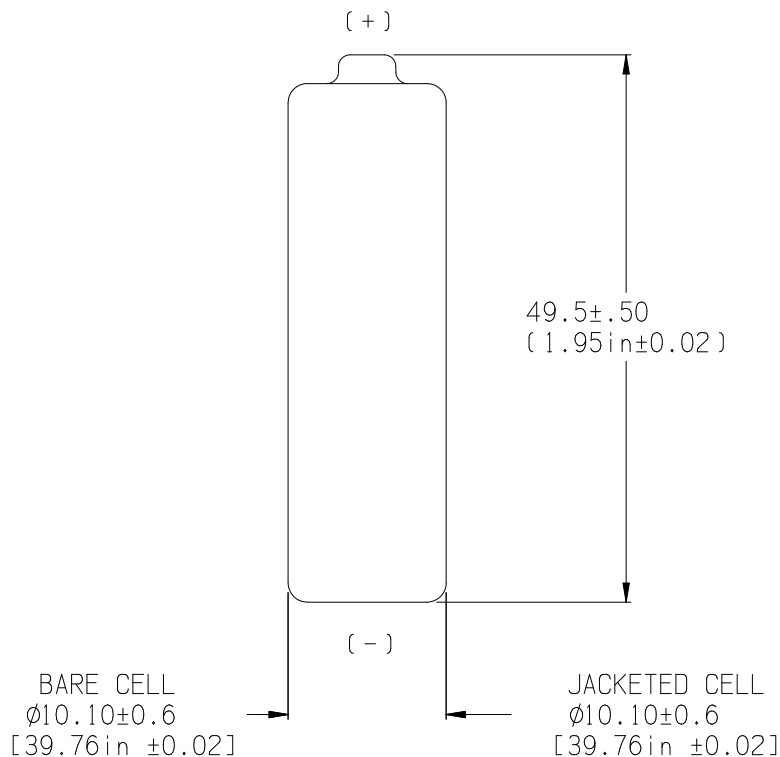

TYPICAL SPECIFICATIONS

ELECTROCHEMICAL SYSTEM: NICKEL CADMIUM OR NICKEL-METAL HYDRIDE				
NOMINAL VOLTAGE: 1.2				
MAXIMUM OFF-LOAD VOLTAGE: 1.5				
RATED CAPACITY:				
AVERAGE WEIGHT:				
OPERATING TEMP. RANGE: CHARGE: 0°C TO 45°C (32°F TO 113°F), DISCHARGE: -20°C TO 50°C (-40°F TO 122°F)				
ANSI DESIGNATION: 1.2K7, 1.2H7				
TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION
TAPE, ELECTRONIC GAMES				

TYPICAL MPD HOLDER NO. BCAAAPC

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	TOSHIBA	VARTA	OTHER
						1.2K7						
						1.2H7						