


TYPICALLY FOR INDUSTRIAL USERS

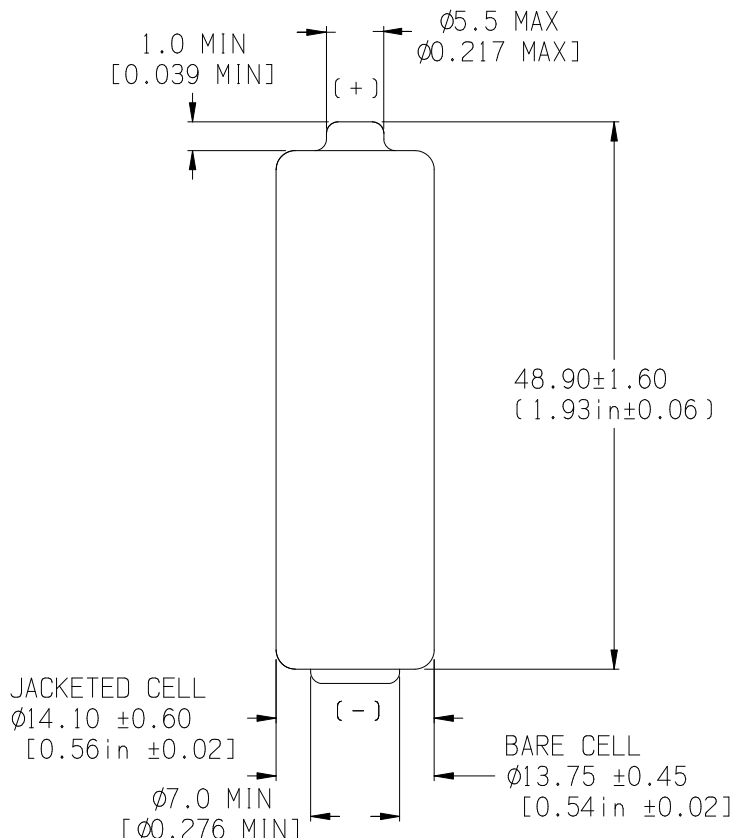

TYPICAL SPECIFICATIONS

ELECTROCHEMICAL SYSTEM: NICKEL CADMIUM OR NICKEL-METAL HYDRIDE

NOMINAL VOLTAGE: 1.2

MAXIMUM OFF-LOAD VOLTAGE: 1.5

RATED CAPACITY: 1500mAh TO 1.0V AT 21°C (70°F)

AVERAGE WEIGHT: 0.91 oz (26.0 g)

OPERATING TEMP. RANGE: CHARGE: 0°C TO 45°C (32°F TO 113°F), DISCHARGE: -20°C TO 50°C (-40°F TO 122°F)

ANSI DESIGNATION: 1.2K11, 1.2H11

TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION
TAPE, ELECTRONIC GAMES				

TYPICAL MPD HOLDER NO. BCAAPC OR BHAA-3

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	TOSHIBA	VARTA	OTHER
			KR 15/51			1.2K11	P-60AA/B					
			HR 15/51			1.2H11	HHR150AA					ISKRA-1500