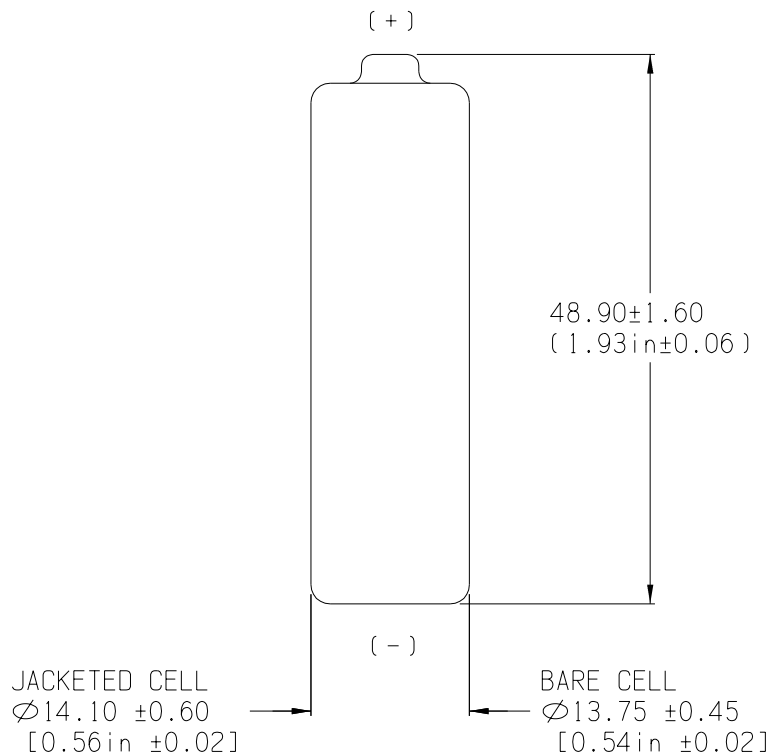


TYPICALLY FOR INDUSTRIAL USERS

**TYPICAL SPECIFICATIONS**

ELECTROCHEMICAL SYSTEM:	NICKEL CADMIUM OR NICKEL-METAL HYDRIDE
NOMINAL VOLTAGE:	1.2
MAXIMUM OFF-LOAD VOLTAGE:	1.5
RATED CAPACITY:	1500mAh TO 1.0V AT 21°C (70°F)
AVERAGE WEIGHT:	0.91 oz (26.0 g)
OPERATING TEMP. RANGE:	CHARGE: 0°C TO 45°C (32°F TO 113°F), DISCHARGE: -20°C TO 50°C (-40°F TO 122°F)
ANSI DESIGNATION:	1.2K11, 1.2H11

TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION
TAPE, ELECTRONIC GAMES				

TYPICAL MPD HOLDER NO. BCAAPC

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	TOSHIBA	VARTA	OTHER
			KR 15/51			1.2K11	P-60AA/B					
			HR 15/51			1.2H11	HHR150AA					ISKRA-1500