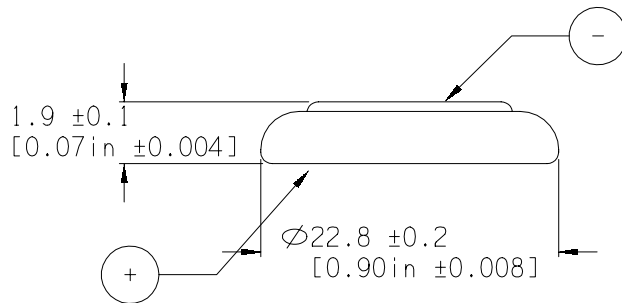


DATE: 03/22/01

BATTERY SPECIFICATION

P/N BR2320

**TYPICAL SPECIFICATIONS**

ELECTROCHEMICAL SYSTEM: LITHIUM CARBON MONOFLUORIDE

NOMINAL VOLTAGE: 3.0

MAXIMUM OFF-LOAD VOLTAGE: 3.7

RATED CAPACITY: 110mAh ON 15k Ω TO 2.0V AT 21°C (70°F)

AVERAGE WEIGHT: 0.088 oz (2.5 g)

OPERATING TEMP. RANGE: -40°C TO 85°C (-40°F TO 185°F)

ANSI DESIGNATION: 5001LB

TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION
RATING	15K	24 hr	2.0	700 hr

TYPICAL MPD HOLDER NO. BH908T-C

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	SONY	VARTA	OTHER
			BR2320			5001LB	BR2320	BR2320				