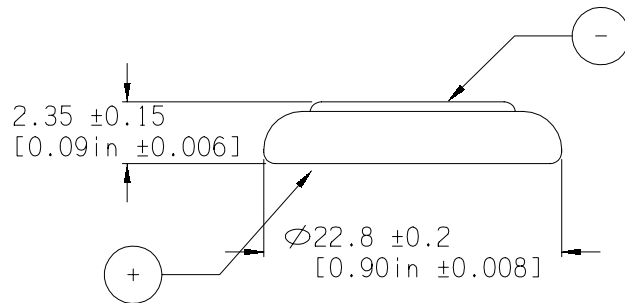


DATE: 03/22/01

BATTERY SPECIFICATION

P/N BR2325

**TYPICAL SPECIFICATIONS**

ELECTROCHEMICAL SYSTEM: LITHIUM CARBON MONOFLUORIDE OR MANGANESE DIOXIDE

NOMINAL VOLTAGE: 3.0

MAXIMUM OFF-LOAD VOLTAGE: 3.7

RATED CAPACITY: 190mAh ON 15k Ω TO 2.0V AT 20°C (68°F)

AVERAGE WEIGHT: 0.106 oz (3.0 g)

OPERATING TEMP. RANGE: -40°C TO 60°C (-40°F TO 140°F)

ANSI DESIGNATION: 5002LB OR 5002LC

| TYPICAL USE RATING | LOAD (OHMS) | DAILY PERIOD | END POINT V | MINIMUM AVERAGE DURATION |
|--------------------|-------------|--------------|-------------|--------------------------|
| | 15K | 24 hr | 2.0 | 950 hr |

TYPICAL MPD HOLDER NO. BH908T-C

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

| AWI | DURACELL | EVEREADY | IEC | KODAK | MAXELL | NEDA | PANASONIC | RAYOVAC | SANYO | SONY | VARTA | OTHER |
|-----|----------|----------|--------|-------|--------|--------|-----------|---------|-------|------|-------|-------|
| | DL2325 | | BR2325 | | | 5002LB | BR2325 | BR2325 | | | | |