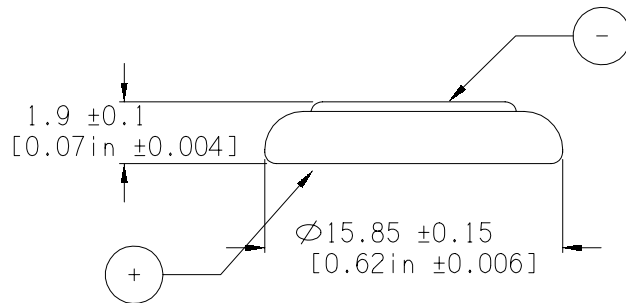


DATE: 03/22/01

**BATTERY SPECIFICATION**

P/N CR1620

**TYPICAL SPECIFICATIONS**

ELECTROCHEMICAL SYSTEM: LITHIUM MANGANESE DIOXIDE

NOMINAL VOLTAGE: 3.0

MAXIMUM OFF-LOAD VOLTAGE: 3.7

RATED CAPACITY: 60mAh ON  $15k\Omega$  TO 2.0V AT 21°C (70°F)

AVERAGE WEIGHT: 0.042 oz (1.2 g)

OPERATING TEMP. RANGE: -40°C TO 60°C (-40°F TO 140°F)

ANSI DESIGNATION: 5009LC

TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION
RATING	47K	24 hr	2.0	1150 hr

**TYPICAL MPD HOLDER NO. BH600**

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	SONY	VARTA	OTHER
L08	DL1620	ECR1620	CR1620			5009LC	CR1620		CR1620		CR1620	