


TYPICALLY FOR INDUSTRIAL USERS

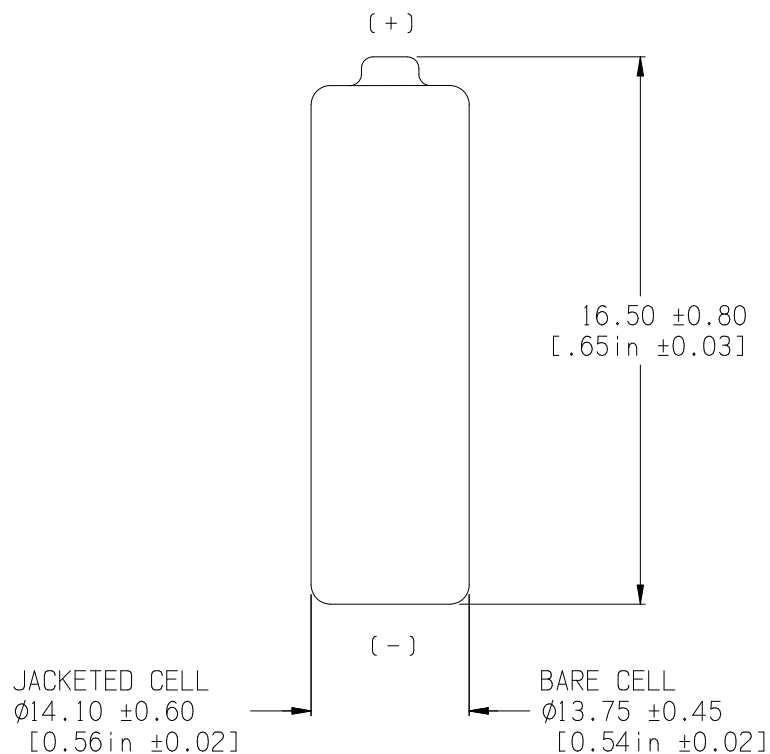

## TYPICAL SPECIFICATIONS

ELECTROCHEMICAL SYSTEM: NICKEL CADMIUM OR NICKEL-METAL HYDRIDE

NOMINAL VOLTAGE: 1.2

MAXIMUM OFF-LOAD VOLTAGE: 1.5

RATED CAPACITY: 110mAh TO 1.0V AT 20°C (68°F)

AVERAGE WEIGHT: 0.23 oz (6.5 g)

OPERATING TEMP. RANGE: CHARGE: 0°C TO 50°C (32°F TO 122°F), DISCHARGE: -20°C TO 50°C (-4°F TO 122°F)

ANSI DESIGNATION: 1.2K8, 1.2H8

TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION
RATING				

TYPICAL MPD HOLDER NO.

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	TOSHIBA	VARTA	OTHER
			KR 15/18			1.2K8	P-11AA					